


ENTRY / EXIT



Minimum 1620

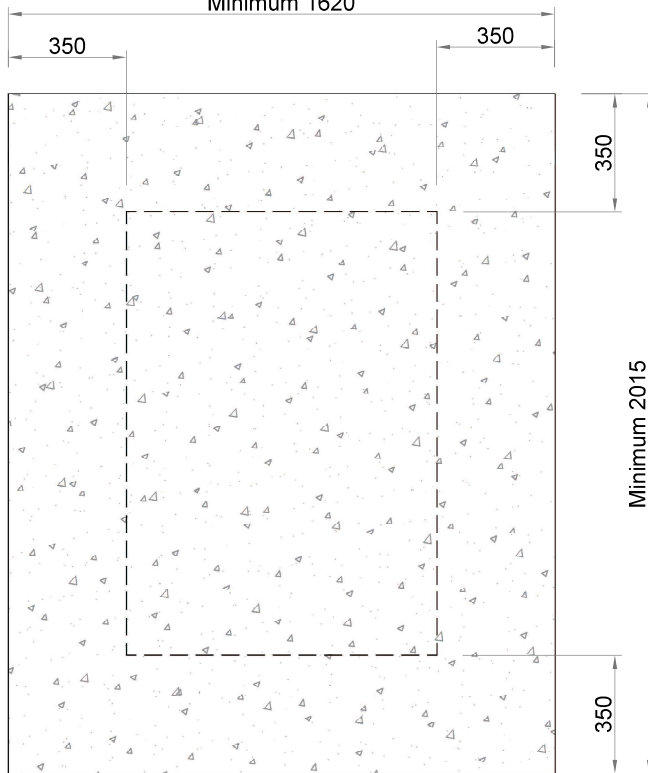


ENTRY / EXIT



665 steel mesh

20 Mpa Concrete




FOUNDATION

NOTE

Allow for thickness of safety surface above the surface of the concrete foundation
Foundation to be square, level and smooth

Note Thickening of foundation of perimeter to allow for sufficient depth for drilling of chemset fasteners

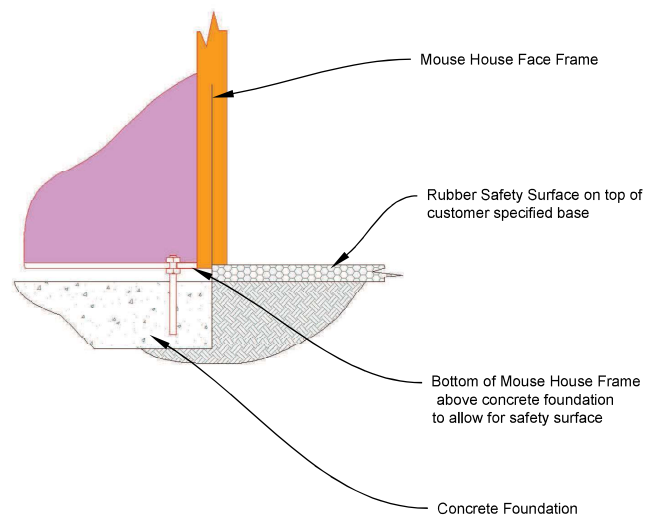

Cross Section of recommended Safety surface Treatment